

GATE

USB-Link Manual

Version: v1.1

Spis treści

1. Introduction.....	3
2. Installation.....	3

1. Introduction

USB-Link allows you to simply update the firmware and adjust the settings of a compatible GATE device using GATE Control Station computer App.

Currently, USB-Link is compatible with the TITAN Drop-In Module and TITAN Tactical Programming Card.


Technical parameters:

Operating voltage:	4.5 ÷ 5.5 V
Current consumption:	35 mA
Dimensions:	31.1x14 x 8.4 mm
Weight:	3.8 g
Operating temperature:	-20 ÷ +70 °C


2. Installation

USB-Link is compatible with all the computers with MS Windows. To be able to use the device you should install the USB-Link firstly.


Connect the USB-Link to the PC's USB port and wait until MS Windows has installed all necessary drivers.

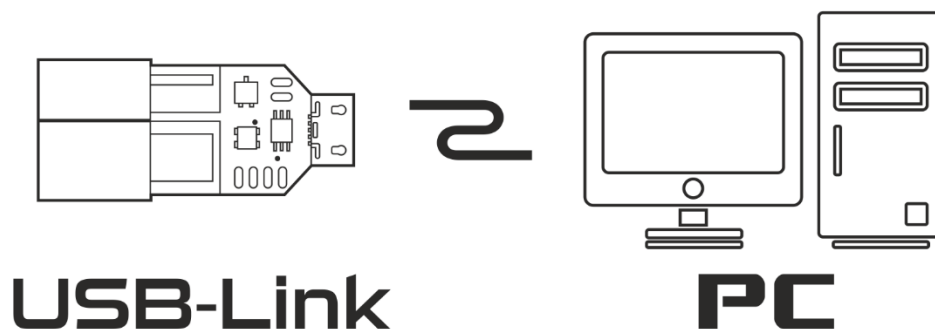

When installation is done, the next position in **Ports (COM and LPT)** should appear. To check this, press **My Computer** with the right mouse button. In the window which has just appeared, choose **Device Manager**.

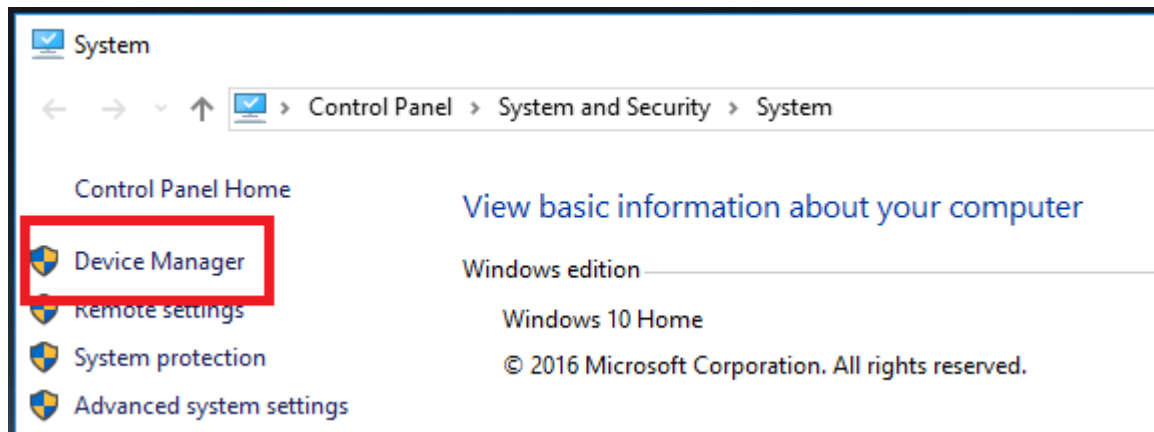

In the **Device Manager** window, find **Ports (COM and LPT)** and show its contents. If the USB-Link was installed properly, you should see the **USB Serial Port** (COM number can vary depending on the devices installed).

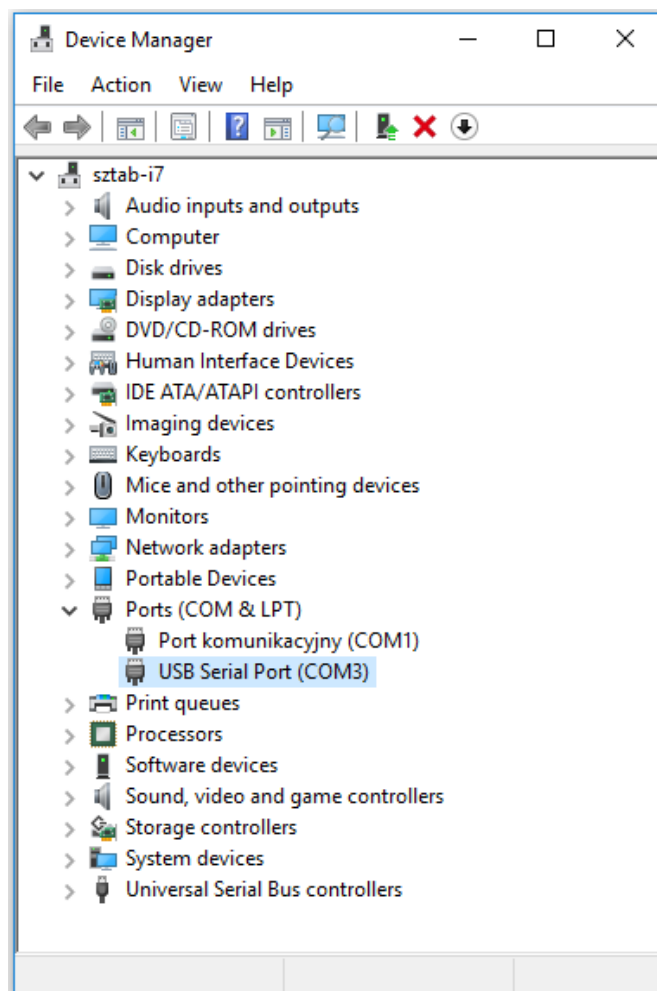

If you cannot see your device on the list or it is accompanied by exclamation mark it means that you must install the device's driver manually. You can download the driver here: <http://www.ftdichip.com/Drivers/D2XX.htm>.

If the USB-Link is installed, run the GATE Control Station App. The information **USB-Link: Connected** should appear in the bottom right corner.

